


Führungsbuchsen

Bushes

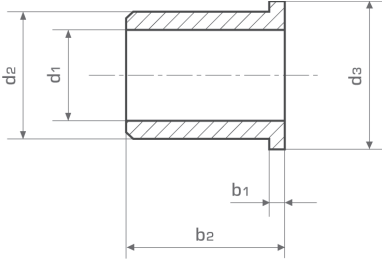

einbaufertig aus Sinterbronze mit eingelagertem Festschmierstoff MoS₂ und daher weitgehend wartungsfrei

oil impregnated bronze bush with MoS₂ added and therefore practically maintenance-free

d ₁ *	d ₂ r7	d ₃	b ₁	b ₂	[kg]	Bestell Nr. Part No.
10	16	22	3	16	0,017	141-010-000
15	21	26	3	16	0,025	141-015-000
20	26	32	3	25	0,042	141-020-000
30	38	46	4	30	0,115	141-030-000
40	50	60	5	50	0,270	141-040-000
50	60	70	5	63	0,580	141-050-000

* Bei Ø d₁ = 10 - 40 mm: Toleranz E7, bei Ø d₁ = 50 mm: Toleranz E8.
For Ø d₁ = 10 - 40 mm: tolerance E7, for Ø d₁ = 50 mm: tolerance E8.