


## NEU! Spannelement NEW! Tensioning Element



**Basiselement | basic element**  
Zur Montage mit Kettenspannrädern und Gleitern  
For assembly with idler sprockets

ISO-No.	*p [inch]	[mm]	d <sub>n</sub>	H	E	K	U	J <sub>1</sub>	J <sub>2</sub>	G	L	M	N	O	T	P	[kg]	Bestell Nr. Part No.
05 B-1		8,0	35	M6	51 <sup>+1</sup> <sub>0,5</sub>	20	16,5	80	60	5	90	20	22	6	8,5	8,0	0,20	381-081-101
05 B-1		8,0	45	M8	64 <sup>+1</sup> <sub>0,5</sub>	25	20,8	100	80	5	112,5	25	30	8	10,5	8,5	0,40	381-081-102
06 B-1	3/8	9,525	58	M10	79 <sup>+1,5</sup> <sub>0,5</sub>	30	25,3	100	80	7	115	30	35	10,5	10,5	8,5	0,60	381-101-103
08 B-1	1/2	12,7	58	M10	79 <sup>+1,5</sup> <sub>0,5</sub>	30	25,3	100	80	7	115	30	35	10,5	10,5	8,5	0,60	381-201-103
10 B-1	5/8	15,875	78	M12	108 <sup>+2</sup> <sub>0,5</sub>	50	34,3	130	100	8	155	40	52	15	12,5	10,5	1,70	381-301-109
12 B-1	3/4	19,05	78	M12	108 <sup>+2</sup> <sub>0,5</sub>	50	34,3	130	100	8	155	40	52	15	12,5	10,5	1,70	381-401-109
16 B-1	1	25,4	95	M16	140 <sup>+2</sup> <sub>0,5</sub>	60	42,0	175	140	10	205	40	66	15	20,5	12,5	3,60	381-501-114
20 B-1	1 1/4	31,75	115	M20	200 <sup>+3</sup> <sub>-1</sub>	70	52,0	225	180	12	260	50	80	18	20,5	12,5	6,40	381-601-123
24 B-1	1 1/2	38,1	115	M20	200 <sup>+3</sup> <sub>-1</sub>	70	52,0	225	180	12	260	50	80	18	20,5	12,5	6,40	381-701-123

## Molykote-Hochleistungs-Kettenspray Molykote High Performance Chain Lubricant

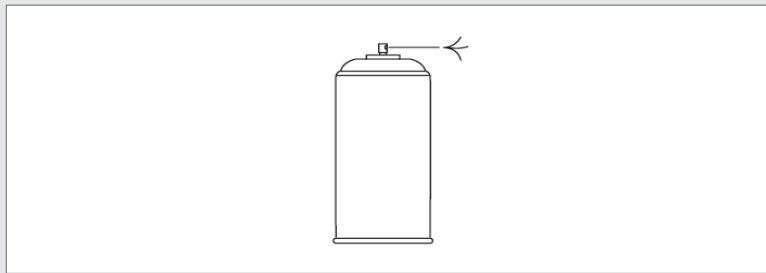

Behälter Container	Inhalt Content	Temp. Einsatzbereich Temp. operational area	Viskosität Viscosity	Wasserbeständigkeit n. DIN 51807 Water resistance acc. to DIN 51807	Bestell Nr. Part No.
Spraydose Can	0,3 l	-25 - 160 [°C]	~ 300 [E] / 50 [°C]	vollkommen perfect	381-000-002