



Rollenketten nach DIN - rostfrei Roller Chains to DIN - Stainless Steel



DIN-Simplex | DIN-Simplex DIN 8187-ISO/R 606
 rostfrei 1.4301 | stainless 1.4301

ISO-No.	p x b ₁		d ₁	d ₂	e	l _{max}	k _{max}	g _{max}	[kN _{min}]*	*[kg/m]	Bestell Nr. / Part No.		
	[inch]	[mm]									Kette	Verschl. Glied	Gekr. Glieder
											Chain	Connec. link	Cranked link single
		8,0 x 3,0	5,0	2,31		8,6	3,1	7,11	4,0	0,18	300-081-600	-601	
	3/8 x 7/32	9,525 x 5,72	6,35	3,28		13,5	3,3	8,26	7,0	0,41	300-101-600	-601	-641
	1/2 x 1/8	12,7 x 3,3	7,75	3,66		10,2	1,5	9,91	7,0	0,28	300-211-600	-601	-641
	1/2 x 3/16	12,7 x 4,88	7,75	3,66		11,2	1,5	9,90	7,0	0,33	300-231-600	-601	-641
	1/2 x 5/16	12,7 x 7,75	8,51	4,45		17,0	3,9	11,81	12,0	0,70	300-201-600	-601	-641
	5/8 x 3/8	15,875 x 9,65	10,16	5,08		19,6	4,1	14,73	14,5	0,95	300-301-600	-601	-641
	3/4 x 7/16	19,05 x 11,68	12,07	5,72		22,7	4,6	16,13	18,5	1,25	300-401-600	-601	-641
	1 x 17	25,4 x 17,02	15,88	8,28		36,1	5,4	21,08	40,0	2,70	300-501-600	-601	-641

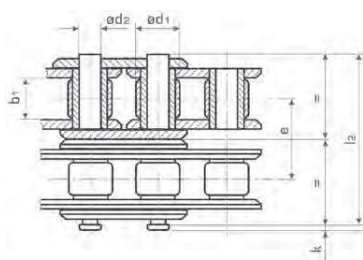

DIN-Duplex | DIN-Duplex DIN 8187-ISO/R 606
 rostfrei 1.4301 | stainless 1.4301

ISO-No.	p x b ₁		d ₁	d ₂	e	l _{max}	k _{max}	g _{max}	[kN _{min}]*	*[kg/m]	Bestell Nr. / Part No.		
	[inch]	[mm]									Kette	Verschl. Glied	Gekr. Glieder
											Chain	Connec. link	Cranked link single
	3/8 x 7/32	9,525 x 5,72	6,35	3,28	10,24	23,4	3,3	8,2	11,7	0,78	300-102-600	-601	-641
	1/2 x 5/16	12,7 x 7,75	8,51	4,45	13,92	31,0	3,9	11,81	17,4	1,35	300-202-600	-601	-641
	5/8 x 3/8	15,875 x 9,65	10,16	5,08	16,59	36,2	4,1	14,73	29,0	1,85	300-302-600	-601	-641
	3/4 x 7/16	19,05 x 11,68	12,07	5,72	19,46	42,2	4,6	16,13	34,0	2,50	300-402-600	-601	-641



[kN_{min}]*: Bruchkraft | breaking load
 *[kg/m]: Gewicht per Meter | weight per meter